
www.mute.design Fact sheet

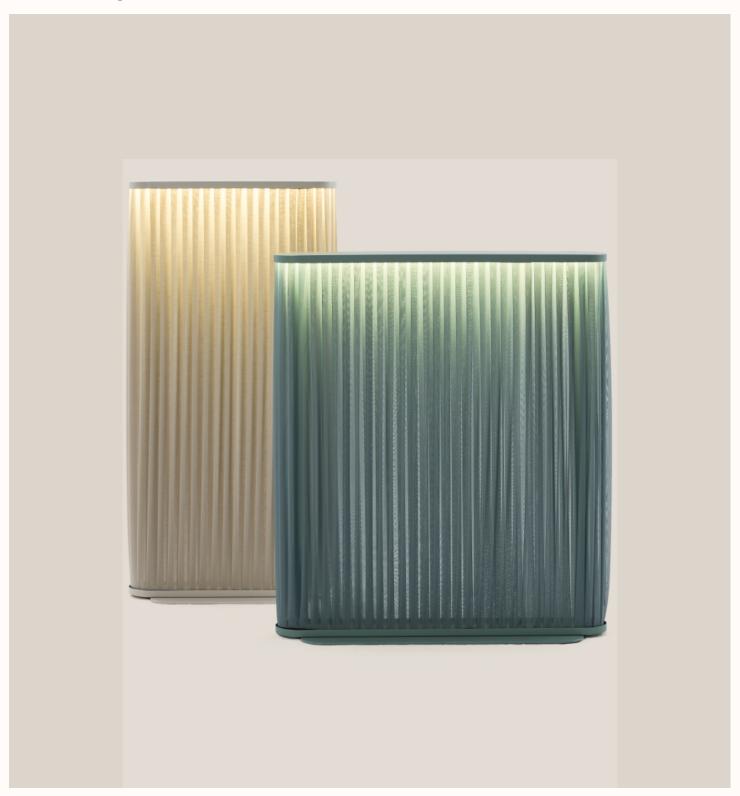

# MIST

A pair of standing acoustic lighting. Pioneering in design and beautiful in craft.

Designed by Maja Ganszyniec

мите.

### **GENERAL**

Type: Floor lamp

Light version: LED (inside, top)

Recommended use: Hotels, Restaurants, Cafes, Breakout areas, Receptions

## COMPOSITION


- Powder coated aluminum
- · Powder coated steel


Plexiglass

- · Source of light
- · Semitransparent curtain (for translucency of the product)

SHAPES AND DIMENSIONS mm +/-5 mm







## **WEIGHTS** kg

SHORT (1180×1360)	TALL (800×1600)
45	35

## **ACOUSTIC PROPERTIES**



Attenuation



Medium and high tones

# LED TAPE LIGHT SOURCE PROPERTIES



Wattage: 55 W (Short) / 50 W (Tall) Input Voltage: 230 V AC Color Temperature: 3000K / 4000K

Average rated life: L90B20 50 000 h

Certificates: CE

A LED strip mounted under the top cover of the lamp provides ambient lighting that does not hurt the eyes.

## **FIXING SYSTEM**

The lamp is delivered with a black power cable (3 m) and electric wire type FR. Other electrical standards should be marked on the order.

# **OPTIONAL ELECTRIC CHARGERS**

A circle Qi induction charger or an USB A+C port can be mounted in a top cover of the Short lamp (1360mm height). Both come in matt black.






# SOUND ABSORPTION AOBJ PER ISO 354 FOR MIST H1360



MIST | MUTC. Fact sheet

## **DESIGNER MONOCHROMATIC SETS**

The lamp is available in six monochromatic color sets, consisting of the color of the metal/aluminum part and the corresponding shade of the curtain's fabric.

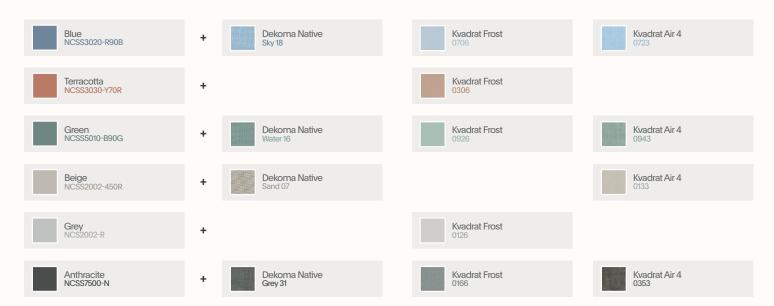

# **SELECTION OF CURTAINS**

NAME	COMPOSITION	<b>WEIGHT</b> g/m <sup>2</sup>	<b>WIDTH</b> mm	<b>FLAMMABILITY</b> certificates	LIGHT FASTNESS ISO 105-B02
Native by Dekoma	100% polyester	115	285	BS EN 1021-1 BS EN 1021-2	4-5
Frost by Kvadrat	50% polyester FR, 50% polyester	150	300	BS EN 1021-1 BS EN 1021-2 DIN 4102-B1	5-7
Air by Kvadrat	100% Trevira CS	220	300	BS EN 1021-1 BS EN 1021-2 DIN 4102-B1	6-7

# PACKAGING (LxWxH)

Depending on the size, the product is shipped in following sizes of packaging:

- 1265×385×1395 mm (Tall)
- · 865×385×1635 mm (Short)

# CARE

- $\bullet$  Keep the product dry and away from air conditioning and ventilation system
- Keep away from direct sun light and heat sources
- Vacuum regularly