



SPACE L

MEETING

DOUBLE

W/O FURNITURE



ISOLATION





LOW, MEDIUM
& HIGH TONES

An alternative to classic conference rooms, video rooms and project rooms. Three versions to match every office.

MUTE.

SHAPE AND DIMENSIONS mm

+/- 3 mm

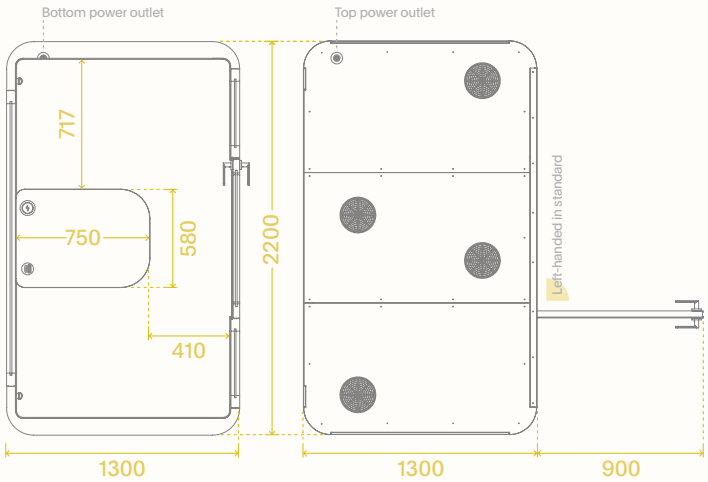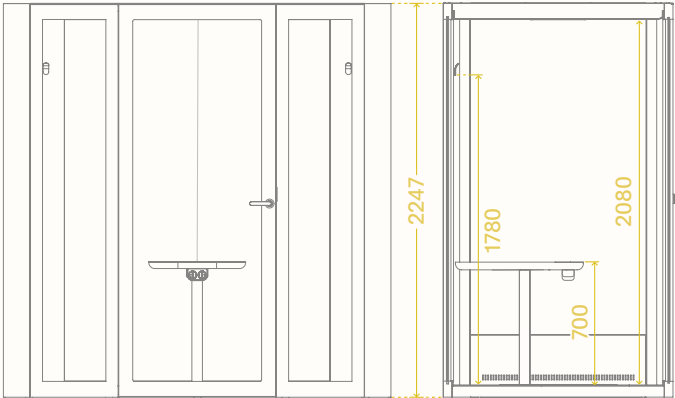

DIMENSIONS mm

	WIDTH	DEPTH	HEIGHT
External	2200	1300 +900 mm with open door	2247 +200 mm for ventilation +20 mm for leveling
Internal	2000	1192	2080

WEIGHTS kg

NET	GROSS
725	971 including wooden case and packaging parts

COMPOSITION

The construction of Space L is the effect of work of our acoustics, technology and design departments. Walls of Space L are built from several layers of meticulously chosen materials responsible for one of the highest results of sound isolation and sound absorption inside the pod.

- Absorbing materials
 - Felt
 - Metal covers
- Isolating materials
 - Plywood
 - Soundproof glass


USAGE

- Open space
- Reception
- Other public spaces (including railway stations and airports)
- Library
- Breakout area


CARE

- Keep the product dry
- Vacuum and clean regularly
- Follow the assembly instructions and terms of use

AVERAGE SOUND INSULATION

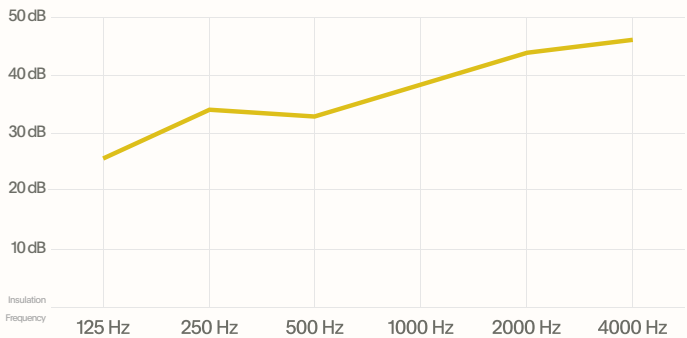


RT20 PERFORMANCE INSIDE PER PN-EN ISO 354:2005

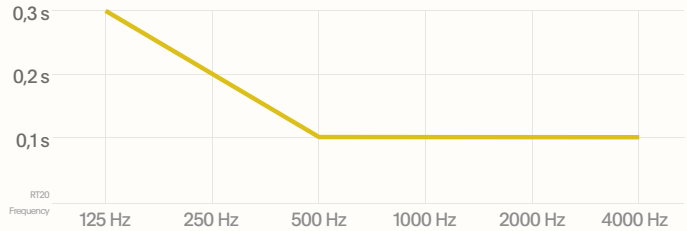

PACKING

- Space L is delivered in two wooden cases, each of following dimensions:





W 2360 x D 885 x H 1345 mm



- Dedicated sofas are delivered in two boxes, each of following dimensions:





W 1220 x D 640 x H 800 mm

SOFAS WITHOUT ARMREST mm +/- 3 mm

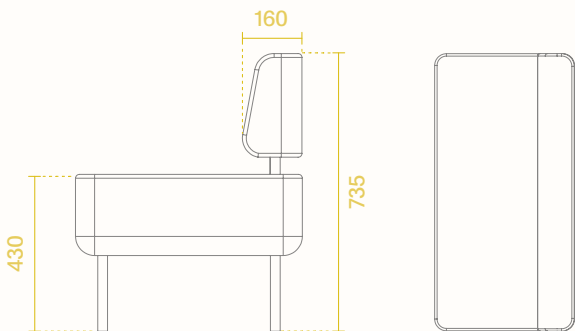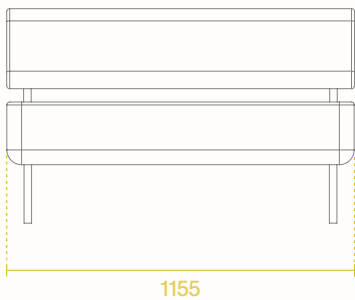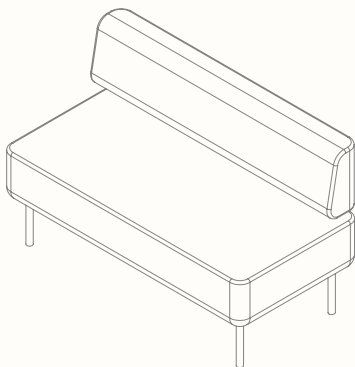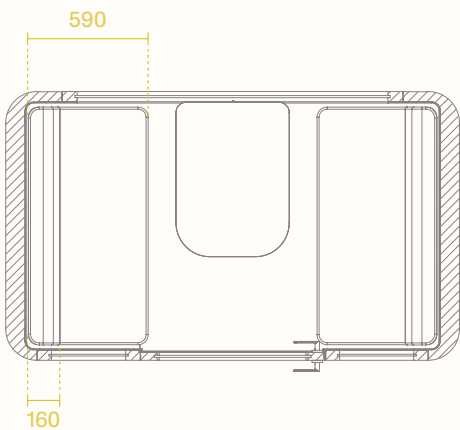

Weight of a single sofa: 17 kg

SOFAS WITH ARMREST mm +/- 3 mm

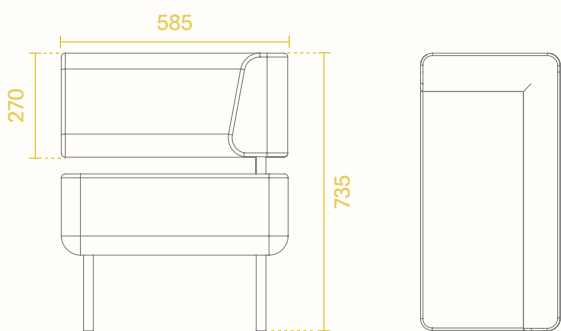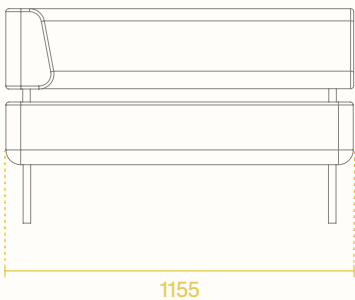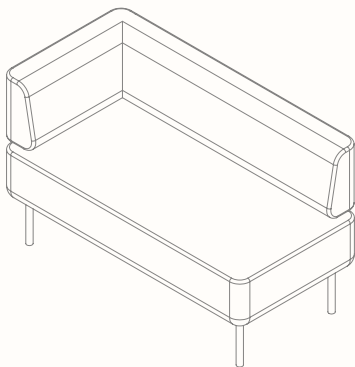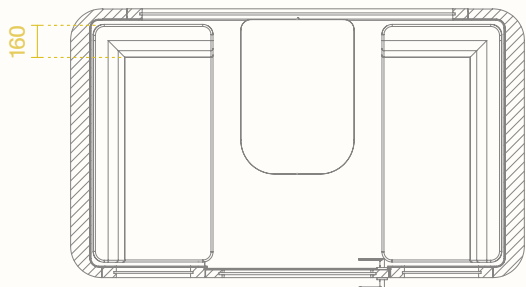

Weight of a single sofa: 23 kg

TECHNICAL SPECIFICATIONS

POWER CONSUMPTION



Standby: 4,5 W
Working: 47 W (fans, LEDs)
CE ✓RoHS 3 m cable



Max. power supply (exc. plugged receivers): 70 W
Power supply voltage: 220-240 / 100-120 VAC, 50-60 Hz
Supply voltage for ventilation, lighting and addons: 12 - 24 V DC

FANS PERFORMANCE



Airflow: 180 m³/ hour



Fan emitted noise level in L_{Aeq}
Inside ≤ 38 dB
Outside ≤ 36 dB



The level of outside noise measured at a distance of 1.5 meters.
The Space series achieves one of the best results on the market.

External fan noise is comparable to one in typical open offices (<45 dB) and will create an acoustic background for employees nearby.

LIGHTING



Power: 24 W
Brightness: 450 lx (2460 lm at source)
Light color temp.: 4000 K



Fans and light activated
by occupancy sensor

GLASS PROPERTIES PER EN 410



Light transmission: 87
Light reflection: 8
Solar energy transmittance: 70
Reflection of solar radiation: 7
Total solar energy transmittance: 76

HEALTH AND SUSTAINABILITY COMPLIANCES



Formaldehyde and VOC safe: EU E1 Standard
Quality management system of ISO 9001
Environmental management system of ISO 14001
FSC Certificate No. C161812

STANDARD EQUIPMENT



Ventilation system



LED Light



Occupancy sensor



3 electric sockets¹



Graphite carpet



2 wall hooks
max load 5 kg



Sliding tabletop

EQUIPMENT PROPERTIES



Sliding tabletop
without height adjustment

18 kg

Total weight

700 mm

Mounting height



CBS Lima monitor arm
with VESA 75 & 100 plate

27"

Recommended screen size

6,5 kg

Maximum monitor weight

+80°/-10° VESA plate tilt range

OPTIONAL ADD-ONS



2 sofas with/without armrest
in Synergy or Remix3 fabric



CBS Lima monitor arm
(white/black/silver)



USB A+C port²
integrated in the tabletop



Induction charger²
integrated in the tabletop



LAN connection³
with 10 m wire



Light and ventilation
control panel



Right-handed
door opening



Integrated wheels
for easy relocation



¹ Socket type E is installed as standard. Other electrical type should be requested.

² Electric socket, USB ports and induction charger are available only in black.

³ An optional 10 m LAN cable is set with the power cord and can be led out of the pod's floor (standard) or ceiling (option). Please make a selection while ordering.

SHAPE AND DIMENSIONS mm

+/- 3 mm

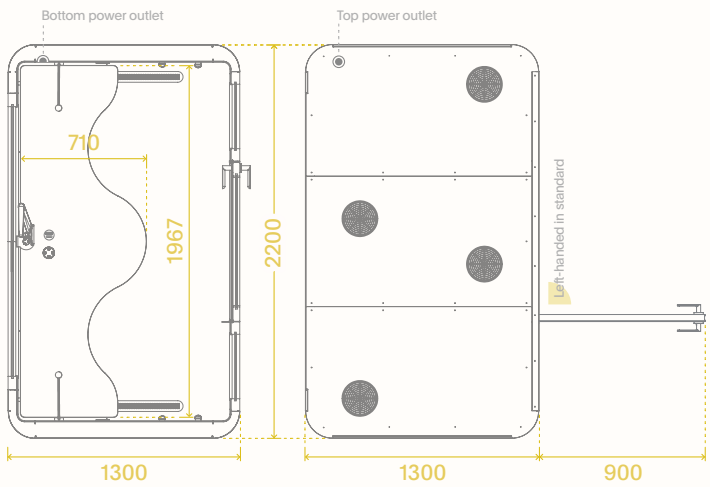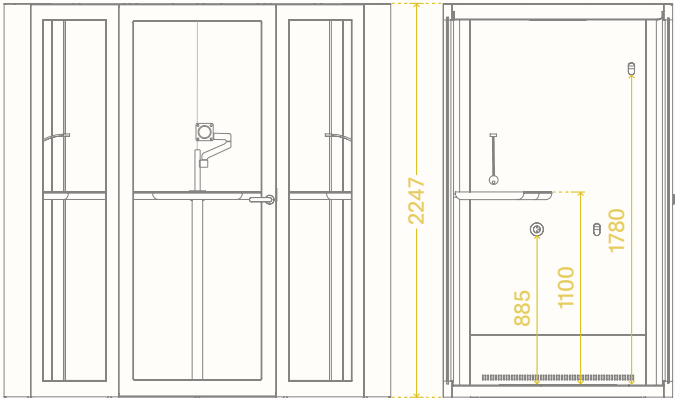

DIMENSIONS mm

	WIDTH	DEPTH	HEIGHT
External	2200	1300 +900 mm with open door	2247 +200 mm for ventilation +20 mm for leveling
Internal	2000	1192	2080

WEIGHTS kg

NET	GROSS
695	941 including wooden case and packaging parts

COMPOSITION

The construction of Space L is the effect of work of our acoustics, technology and design departments. Walls of Space L are built from several layers of meticulously chosen materials responsible for one of the highest results of sound isolation and sound absorption inside the pod.

- Absorbing materials
- Felt
- Isolating materials
- Metal covers
- Plywood
- Soundproof glass


USAGE

- Open space
- Library
- Reception
- Breakout area
- Other public spaces (including railway stations and airports)


CARE

- Keep the product dry
- Vacuum and clean regularly
- Follow the assembly instructions and terms of use

AVERAGE SOUND INSULATION

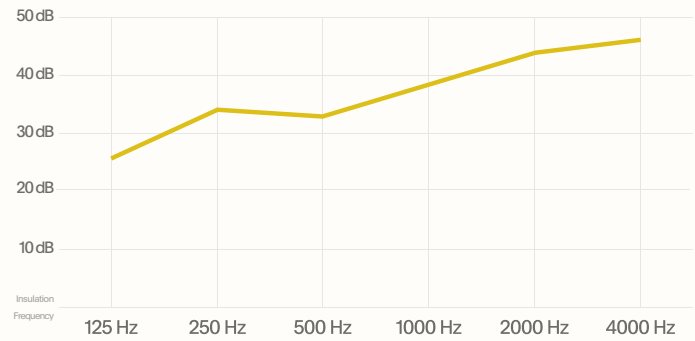


RT20 PERFORMANCE INSIDE PER PN-EN ISO 354:2005

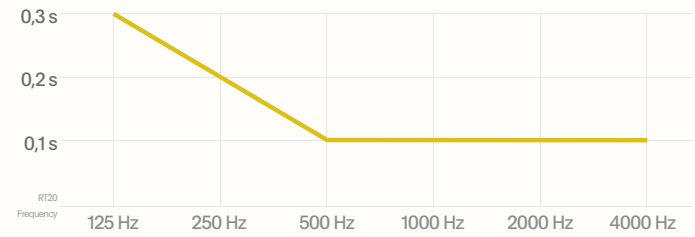

PACKING

- Space L is delivered in two wooden cases, each of following dimensions:

W 2360 x D 885 x H 1345 mm



TECHNICAL SPECIFICATIONS

POWER CONSUMPTION



Standby: 4,5 W
Working: 47 W (fans, LEDs)
CE ✓RoHS 3 m cable



Max. power supply (exc. plugged receivers): 75 W
Power supply voltage: 220-240 / 100-120 VAC, 50-60 Hz
Supply voltage for ventilation, lighting and addons: 12 - 24 V DC

FANS PERFORMANCE



Airflow: 180 m³/ hour



Fan emitted noise level in L_{Aeq}
Inside ≤ 39 dB
Outside ≤ 36 dB



The level of outside noise measured at a distance of 1.5 meters.
The Space series achieves one of the best results on the market.

External fan noise is comparable to one in typical open offices (<45 dB) and will create an acoustic background for employees nearby.

STANDARD EQUIPMENT



Ventilation system



LED Light



Occupancy sensor



3 electric sockets¹



Graphite carpet



4 wall hooks
max load 5 kg



Profiled tabletop

OPTIONAL ADD-ONS



USB A+C port²
integrated in the tabletop



Induction charger²
integrated in the tabletop



LAN connection³
with 10 m wire



Two flexible lamps²
with USB-A port



Light and ventilation control panel



CBS Lima monitor arm
(white/black/silver)



Right-handed door opening



Integrated wheels
for easy relocation

LIGHTING



Power: 24 W
Brightness: 844 lx (2460 lm at source)
Light color temp.: 4000K



Fans and light activated
by occupancy sensor



Wall lamp with 17 W USB-charger
Brightness: 100 lx
Light color temp.: 3000K
Power usage: 1,5 W

GLASS PROPERTIES PER EN 410



Light transmission: 87
Light reflection: 8
Solar energy transmittance: 70
Reflection of solar radiation: 7
Total solar energy transmittance: 76

HEALTH AND SUSTAINABILITY COMPLIANCES



Formaldehyde and VOC safe: EU E1 Standard
Quality management system of ISO 9001
Environmental management system of ISO 14001
FSC Certificate No. C161812

EQUIPMENT PROPERTIES



Profiled tabletop
without height adjustment

34 kg Total weight

1100 mm Mounting height



CBS Lima monitor arm
with VESA 75 & 100 plate

27" Recommended screen size

6,5 kg Maximum monitor weight

+80°/-10° VESA plate tilt range


¹ Socket type E is installed as standard. Other electrical type should be requested.

² Electric socket, USB ports, lamp and induction charger are available only in black.

³ An optional 10 m LAN cable is set with the power cord and can be led out of the pod's floor (standard) or ceiling (option). Please make a selection while ordering.

SHAPE AND DIMENSIONS mm

+/- 3 mm

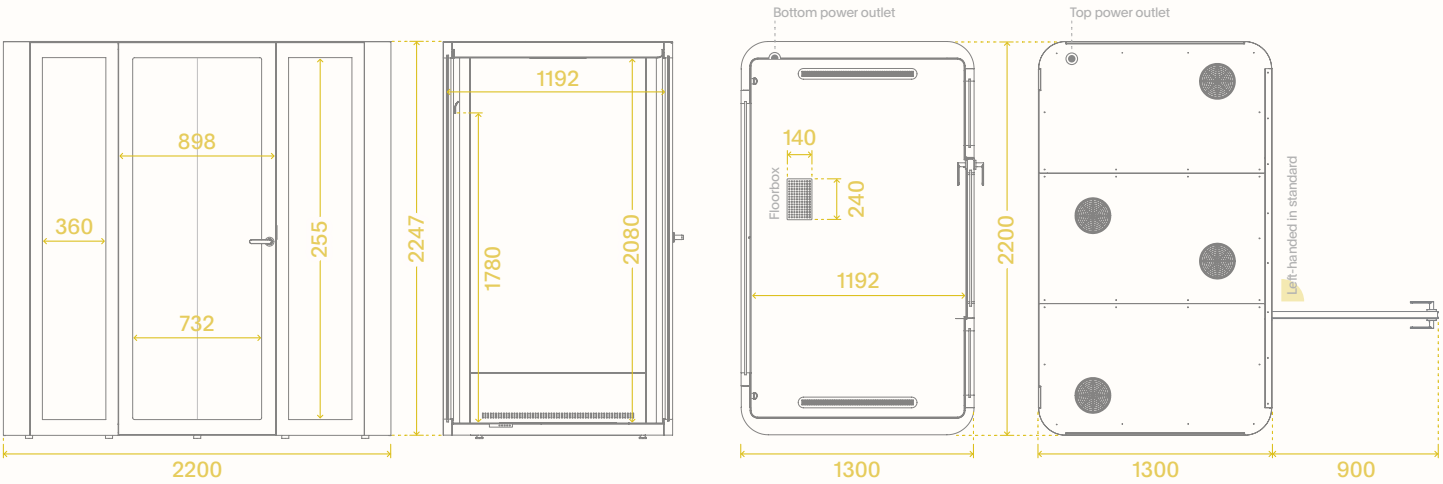

DIMENSIONS mm

	WIDTH	DEPTH	HEIGHT
External	2200	1300 +900 mm with open door	2247 +200 mm for ventilation +20 mm for leveling
Internal	2000	1192	2080

WEIGHTS kg

NET	GROSS
661	907 including wooden case and packaging parts

COMPOSITION

The construction of Space L is the effect of work of our acoustics, technology and design departments. Walls of Space L are built from several layers of meticulously chosen materials responsible for one of the highest results of sound isolation and sound absorption inside the pod.

- Absorbing materials
 - Metal covers
- Felt
 - Plywood
- Isolating materials
 - Soundproof glass


USAGE

- Open space
- Reception
- Other public spaces (including railway stations and airports)
- Library
- Breakout area


CARE

- Keep the product dry
- Vacuum and clean regularly
- Follow the assembly instructions and terms of use

AVERAGE SOUND INSULATION

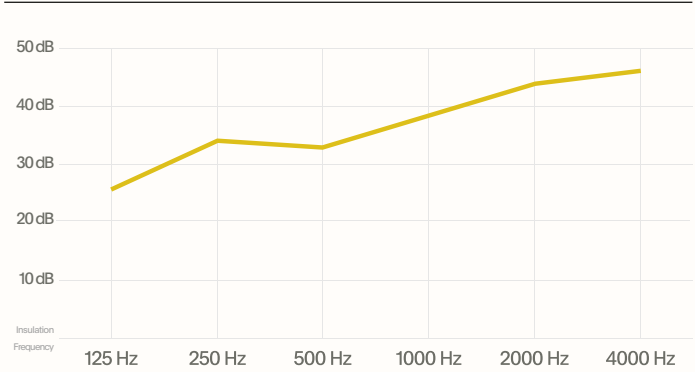


RT20 PERFORMANCE INSIDE PER PN-EN ISO 354:2005

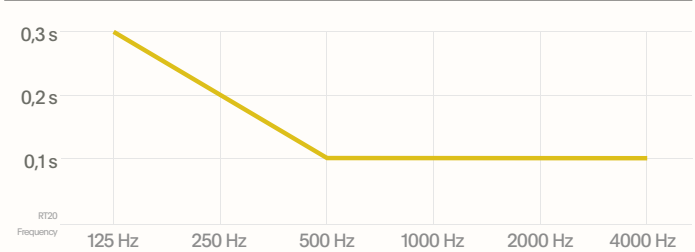

PACKING

- Space L is delivered in two wooden cases, each of following dimensions:

W 2360 x D 885 x H 1345 mm



TECHNICAL SPECIFICATIONS

POWER CONSUMPTION



Standby: 4,5 W
Working: 47 W (fans, LEDs)
CE ✓RoHS 3 m cable



Max. power supply (exc. plugged receivers): 70 W
Power supply voltage: 220-240 / 100-120 VAC, 50-60 Hz
Supply voltage for ventilation, lighting and addons: 12 - 24 V DC

FANS PERFORMANCE



Airflow: 180 m³/ hour



Fan emitted noise level in LAeq
Inside ≤ 38 dB
Outside ≤ 36 dB



The level of outside noise measured at a distance of 1.5 meters.
The Space series achieves one of the best results on the market.

External fan noise is comparable to one in typical open offices (<45 dB) and will create an acoustic background for employees nearby.

LIGHTING



Power: 24 W
Brightness: 450 lx (2460 lm at source)
Light color temp.: 4000K



Fans and light activated by occupancy sensor

GLASS PROPERTIES PER EN 410



Light transmission: 87
Light reflection: 8
Solar energy transmittance: 70
Reflection of solar radiation: 7
Total solar energy transmittance: 76

HEALTH AND SUSTAINABILITY COMPLIANCES



Formaldehyde and VOC safe: EU E1 Standard
Quality management system of ISO 9001
Environmental management system of ISO 14001
FSC Certificate No. C161812

STANDARD EQUIPMENT



Ventilation system



LED Light



Occupancy sensor



3 electric sockets in the floorbox¹



Graphite carpet



2 wall hooks max load 5 kg

OPTIONAL ADD-ONS



USB A+C port in the floorbox²



LAN connection³ with 10 m wire



Right-handed door opening




Integrated wheels for easy relocation



Light and ventilation control panel

¹ Socket type E is installed as standard. Other electrical type should be requested.
² Electric socket and USB ports are available only in black.
³ An optional 10 m LAN cable is set with the power cord and can be led out of the pod's floor (standard) or ceiling (option). Please make a selection while ordering.

FINISHES

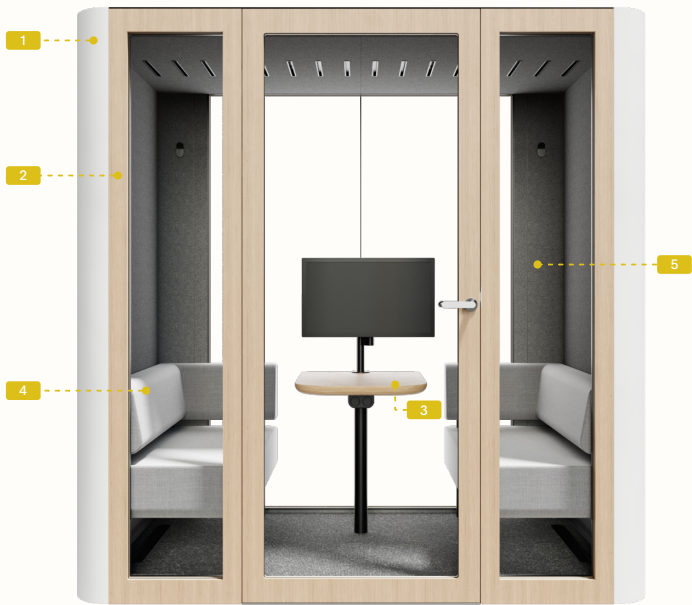

1 EXTERNAL WALLS AND ROOF PAINT COLOURS

STANDARD	 Snow White Ultra Matt RAL 9003	
	 Powder Grey Ultra Matt RAL 7035	 New York Grey Ultra Matt NCS S 3000-N
EXTRA	 Pepper Grey Ultra Matt RAL 7012	 Panther Black Ultra Matt RAL 9005
	 Ceramic Red Ultra Matt NCS S 4050-Y70R	 Dusk Blue Ultra Matt NCS S 4010-B50G
	 St. Tropez Yellow Ultra Matt RAL 1018	 Whiteboard White Glossy Anti-graffiti coating
	 Custom colour From RAL palette	

2 EXTERNAL FRAME LAMINATES & VENEERS

STANDARD	 Snow White NCS S 0500-N	
	 Powder Grey NCS S 1502-G	 New York Grey NCS S 3000-N
EXTRA	 Dusk Blue NCS S 4010-B50G	 Ceramic Red NCS S 4050-Y70R
	 Whiteboard White Glossy 9417-HW	 Black Premium Anti-fingerprint 0720
	 Maple Wood	 Oak Wood

3 INTERNAL TABLETOP LAMINATES & VENEERS

STANDARD	 Snow White NCS S 0500-N	
	 Powder Grey NCS 1502-G	 New York Grey NCS S 3000-N
EXTRA	 Dusk Blue NCS S 4010-B50G	 Ceramic Red NCS S 4050-Y70R
	 Grey Premium Anti-fingerprint 0725	 Black Premium Anti-fingerprint 0720
	 Maple Wood	 Oak Wood

4 INTERNAL OPTIONAL SOFA FABRIC FOR MEETING

KVADRAT REMIX 3	 0422	 0452	 0566	 0906
	 0242	 0123	 0136	 0133
CAMBRAS ENERGY	 0152	 0173	 LDS16	 LDS17
	 LDS28	 LDS58	 LDS76	 LDS77
	 LDS22	 LDS32	 LDS08	 LDS31

5 INTERNAL FELT LININGS

 Beige	 Grey
 Dark Grey	