



# SPACE M

● SINGLE

●● DOUBLE

A comfortable solution when you need to focus on your work or run a short one-to-one meeting.



ISOLATION




LOW, MEDIUM  
& HIGH TONES

## MUTE.

SHAPE AND DIMENSIONS mm

+/- 3 mm

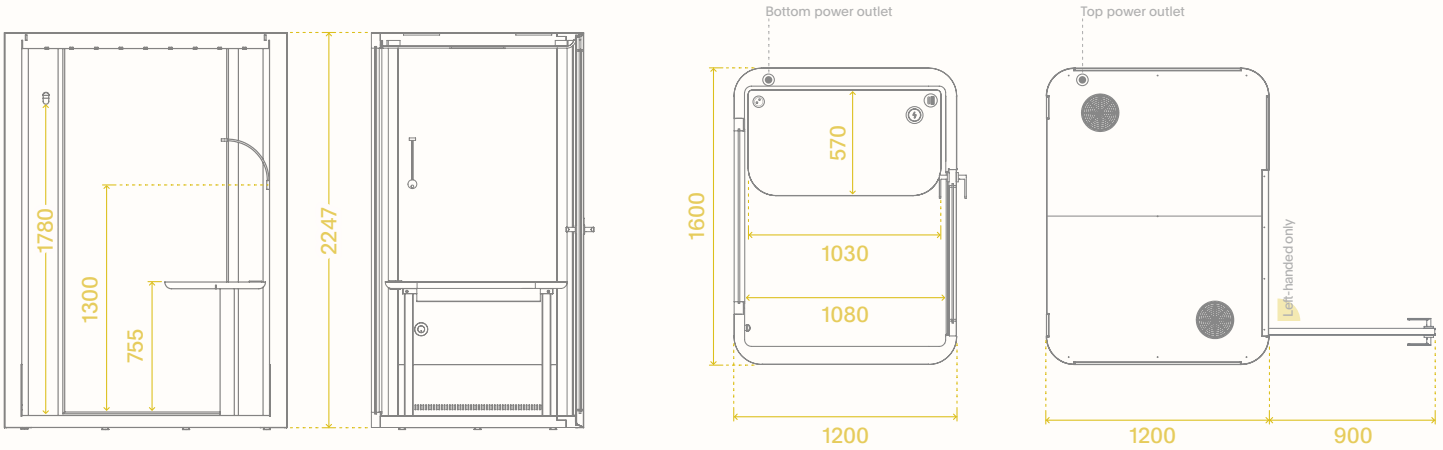

DIMENSIONS mm

	WIDTH	DEPTH	HEIGHT
External	1600	1200 +900 mm with open door	2247 +200 mm for ventilation +20 mm for leveling
Internal	1360	1080	2080

WEIGHTS kg

NET	GROSS
540	625 including boxes and packaging parts

COMPOSITION

The construction of Space M is the effect of work of our acoustics, technology and design departments. Walls of Space M are built from several layers of meticulously chosen materials responsible for one of the highest results of sound isolation and sound absorption inside the pod.

- Absorbing materials

• Metal covers
- Felt

• Plywood
- Isolating materials

• Soundproof glass

USAGE

- Open space

• Reception

• Other public spaces (including railway stations and airports)
- Call center

• Breakout area
- Library


CARE

- Keep the product dry


• Vacuum and clean regularly

• Follow the assembly instructions and terms of use

AVERAGE SOUND INSULATION

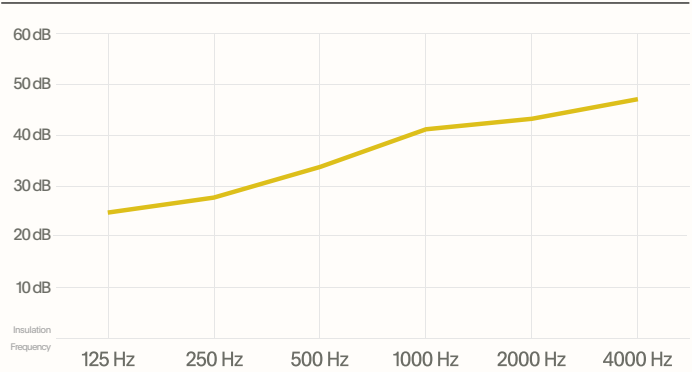


RT20 PERFORMANCE INSIDE PER PN-EN ISO 354:2005

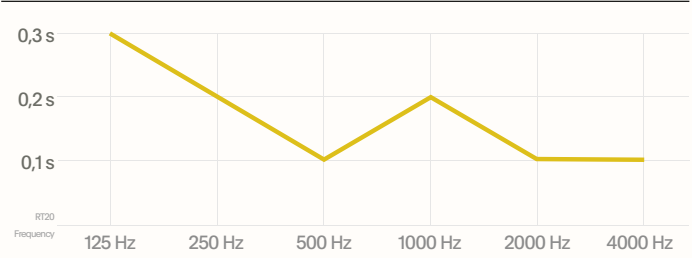

PACKING

- Space M is delivered in 2 cardboard boxes:

W 2335 x D 1310 x H 1350 mm



## TECHNICAL SPECIFICATIONS

## POWER CONSUMPTION



Standby: 4,5 W

Working: 16 W (fans, LEDs)

CE ✓RoHS 3 m cable



Max. power supply (exc. plugged receivers): 55 W

Power supply voltage: 220-240 / 100-120 VAC, 50-60 Hz

Supply voltage for ventilation, lighting  
and addons: 12 - 24 V DC

## FANS PERFORMANCE

Airflow: 73 m<sup>3</sup>/ hourFan emitted noise level in L<sub>Aeq</sub>

Inside ≤ 38 db

Outside ≤ 37 dB

The level of outside noise measured at a distance of 1.5 meters.  
The Space series achieves one of the best results on the market.External fan noise is comparable to one in typical open offices  
(<45 dB) and will create an acoustic background for employees nearby.

## LIGHTING



Power: 7 W

Brightness for sitting position: 300 lx (1230 lm at source)

Brightness for standing position: 450 lx (1230 lm at source)

Light color temp.: 4000K

Fans and light activated  
by occupancy sensor

Wall lamp with 17 W USB-charger

Brightness: 100 lx

Light color temp.: 3000K

Power usage: 1,5 W

## GLASS PROPERTIES PER EN 410



Light transmission: 87

Light reflection: 8

Solar energy transmittance: 70

Reflection of solar radiation: 7

Total solar energy transmittance: 76

## HEALTH AND SUSTAINABILITY COMPLIANCES



Formaldehyde and VOC safe: EU E1 Standard

Quality management system of ISO 9001

Environmental management system of ISO 14001

FSC Certificate No. C161812

## STANDARD EQUIPMENT

Ventilation  
systemLED  
LightOccupancy  
sensorElectric  
socket<sup>1</sup>Graphite  
carpetWall hook  
max load 5 kgDesk without  
height adjustment

## OPTIONAL ADD-ONS

USB A+C port<sup>2</sup>  
integrated in the tabletopInduction charger<sup>2</sup>  
integrated in the tabletopLAN connection<sup>3</sup>  
with 10 m wireDesk with height adjustment  
in Linak systemFlexible lamp<sup>2</sup>  
with USB-A portCBS Lima monitor arm  
(white/black/silver)Light and ventilation  
control panelIntegrated wheels  
for easy relocation

## DESK PROPERTIES

Standard desk  
without height adjustment


39,5 kg Total weight (top and frame)

760 mm Mounting height

Optional Linak system  
of height adjustment1250  
↓  
630 Adjustment range in mm<sup>1</sup> Socket type E is installed as standard. Other electrical type should be requested.<sup>2</sup> Electric socket, USB ports, lamp and induction charger are available only in black.<sup>3</sup> An optional 10 m LAN cable is set with the power cord and can be led out of the pod's floor (standard) or ceiling (option). Please make a selection while ordering.

SHAPE AND DIMENSIONS mm

+/- 3 mm

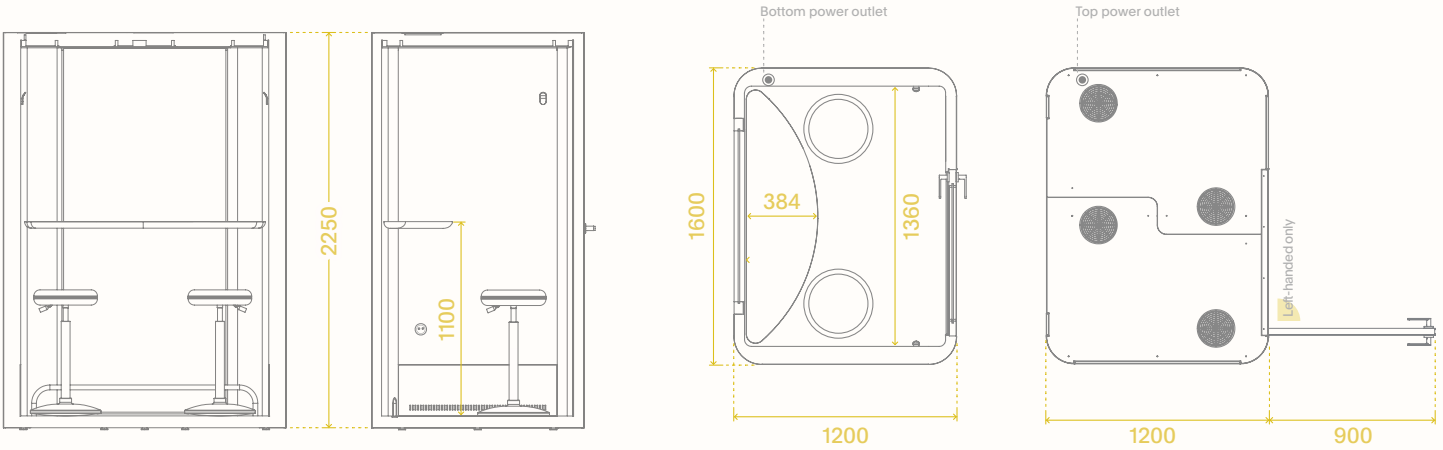

DIMENSIONS mm

	WIDTH	DEPTH	HEIGHT
External	1600	1200 +900 mm with open door	2250 +200 mm for ventilation +20 mm for leveling
Internal	1360	1080	2080

WEIGHTS kg

NET	GROSS
537	622 including boxes and packaging parts

COMPOSITION

The construction of Space M is the effect of work of our acoustics, technology and design departments. Walls of Space M are built from several layers of meticulously chosen materials responsible for one of the highest results of sound isolation and sound absorption inside the pod.

- Absorbing materials
  - Metal covers
- Felt
  - Plywood
- Isolating materials
  - Soundproof glass


USAGE

- Open space
  - Reception
  - Other public spaces (including railway stations and airports)
- Call center
  - Breakout area
- Library


CARE

- Keep the product dry
- Vacuum and clean regularly
- Follow the assembly instructions and terms of use

AVERAGE SOUND INSULATION

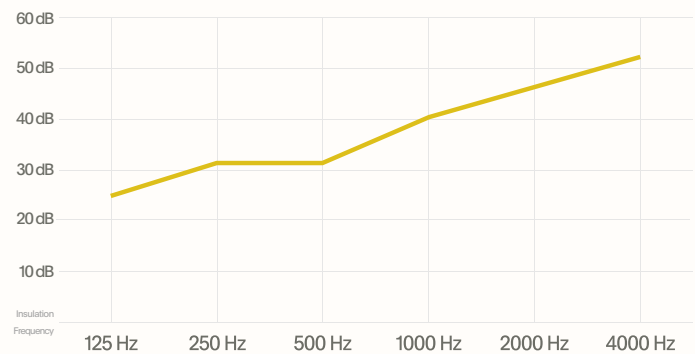


RT20 PERFORMANCE INSIDE PER PN-EN ISO 354:2005

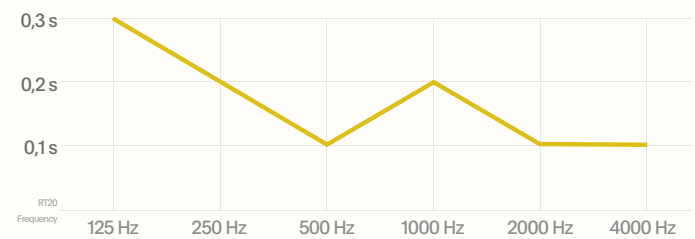

PACKING

- Space M is delivered in 2 cardboard boxes:

W 2335 x D 1310 x H 1350 mm



TECHNICAL SPECIFICATIONS

POWER CONSUMPTION



Standby: 4,5 W  
Working: 35 W (fans, LEDs)  
CE ✓RoHS 3 m cable



Max. power supply (exc. plugged receivers): 40 W  
Power supply voltage: 220-240 / 100-120 VAC, 50-60 Hz  
Supply voltage for ventilation, lighting and addons: 12 - 24 V DC

FANS PERFORMANCE



Airflow: 108 m³/ hour



Fan emitted noise level in LAeq  
Inside ≤ 39 db  
Outside ≤ 37 dB



The level of outside noise measured at a distance of 1.5 meters.  
The Space series achieves one of the best results on the market.  
  
External fan noise is comparable to one in typical open offices (<45 dB) and will create an acoustic background for employees nearby.

LIGHTING



Power: 14 W  
Brightness: 520 lx (1230 lm at source)  
Light color temp.: 4000K



Fans and light activated  
by occupancy sensor

GLASS PROPERTIES PER EN 410



Light transmission: 87  
Light reflection: 8  
Solar energy transmittance: 70  
Reflection of solar radiation: 7  
Total solar energy transmittance: 76

HEALTH AND SUSTAINABILITY COMPLIANCES



Formaldehyde and VOC safe: EU E1 Standard  
Quality management system of ISO 9001  
Environmental management system of ISO 14001  
FSC Certificate No. C161812

STANDARD EQUIPMENT



Ventilation system



LED Light



Occupancy sensor



Electric socket<sup>1</sup>



Graphite carpet



2 wall hooks  
max load 5 kg



Wall-mounted tabletop

DESK PROPERTIES AND OPTIONAL STOOL'S DIMENSIONS mm



Standard tabletop  
without height adjustment

17 kg Total weight

1100 mm Mounting height



Height-adjustable stool  
in Remix3

10 kg Total weight

✓ Moveable

OPTIONAL ADD-ONS



USB A+C port<sup>2</sup>  
integrated in the tabletop



Induction charger<sup>2</sup>  
integrated in the tabletop



LAN connection<sup>3</sup>  
with 10 m wire




Height-adjustable stool  
(1 or 2)



Light and ventilation  
control panel



Integrated wheels  
for easy relocation




<sup>1</sup> Socket type E is installed as standard. Other electrical type should be requested.







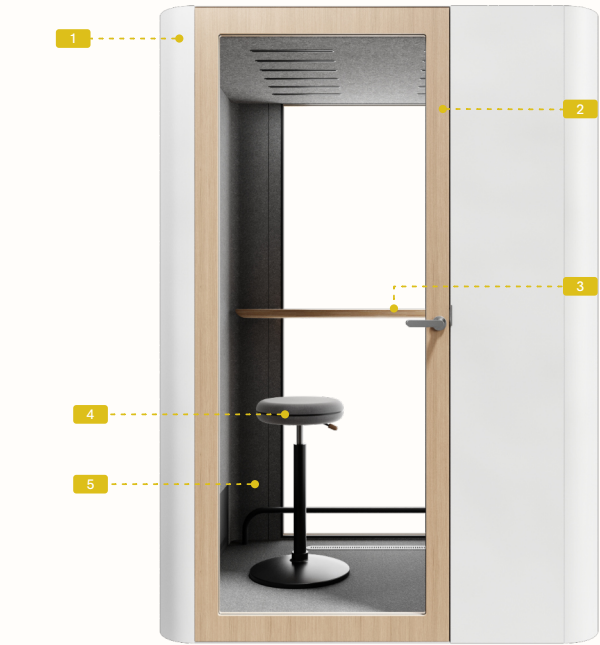



<sup>2</sup> Electric socket, USB ports and induction charger are available only in black.

<sup>3</sup> An optional 10 m LAN cable is set with the power cord and can be led out of the pod's floor (standard) or ceiling (option). Please make a selection while ordering.










FINISHES



1 EXTERNAL WALLS AND ROOF PAINT COLOURS

STANDARD	 Snow White Ultra Matt RAL 9003	
	 Powder Grey Ultra Matt RAL 7035	 New York Grey Ultra Matt NCS S 3000-N
	 Pepper Grey Ultra Matt RAL 7012	 Panther Black Ultra Matt RAL 9005
EXTRA	 Ceramic Red Ultra Matt NCS S 4050-Y70R	 Dusk Blue Ultra Matt NCS S 4010-B50G
	 St. Tropez Yellow Ultra Matt RAL 1018	 Whiteboard White Glossy Anti-graffiti coating
	 Custom colour From RAL palette	











2 EXTERNAL FRAME LAMINATES & VENEERS

STANDARD	 Snow White NCS S 0500-N	
	 Powder Grey NCS S 1502-G	 New York Grey NCS S 3000-N
	 Dusk Blue NCS S 4010-B50G	 Ceramic Red NCS S 4050-Y70R
EXTRA	 Whiteboard White Glossy 9417-HW	 Black Premium Anti-fingerprint 0720
	 Maple Wood	 Oak Wood




3 INTERNAL TABLETOP LAMINATES & VENEERS

STANDARD	 Snow White NCS S 0500-N	
	 Powder Grey NCS 1502-G	 New York Grey NCS S 3000-N
	 Dusk Blue NCS S 4010-B50G	 Ceramic Red NCS S 4050-Y70R
EXTRA	 Grey Premium Anti-fingerprint 0725	 Black Premium Anti-fingerprint 0720
	 Maple Wood	 Oak Wood

4 INTERNAL OPTIONAL STOOL FABRIC FOR DOUBLE

KVAADRAT REMIX 3	 0422	 0452	 0566	 0906
	 0242	 0123	 0136	 0133
	 0152	 0173		

5 INTERNAL FELT LININGS

 Beige	 Grey
 Dark Grey	