



# SPACE XL

CONFERENCE

W/O FURNITURE

A comfy conference room up to seven people for the biggest brainstorm on your deck.



ISOLATION




LOW, MEDIUM  
& HIGH TONES

**MUTE.**

SHAPE AND DIMENSIONS mm

+/- 3 mm

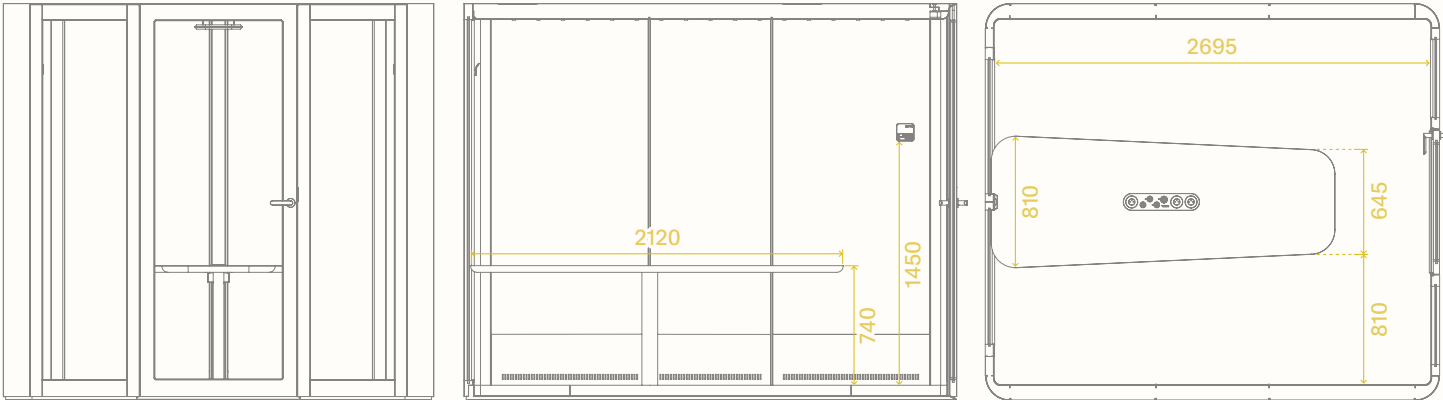

DIMENSIONS mm

	WIDTH	DEPTH	HEIGHT
External	2450	2800 +900 mm with open door	2247 +200 mm for ventilation +20 mm for leveling
Internal	2255	2695	2140

WEIGHTS kg

NET	GROSS
1160	1466 including wooden case and packaging parts

COMPOSITION

The construction of Space XL is the effect of work of our acoustics, technology and design departments. Walls of Space XL are built from several layers of meticulously chosen materials responsible for one of the highest results of sound isolation and sound absorption inside the pod.

- Absorbing materials

Metal covers
- Felt

Plywood
- Isolating materials

Soundproof glass


USAGE

- Open space
- Breakout area
- Other public spaces (including railway stations and airports)


CARE

- Keep the product dry
- Vacuum and clean regularly
- Follow the assembly instructions and terms of use

AVERAGE SOUND INSULATION

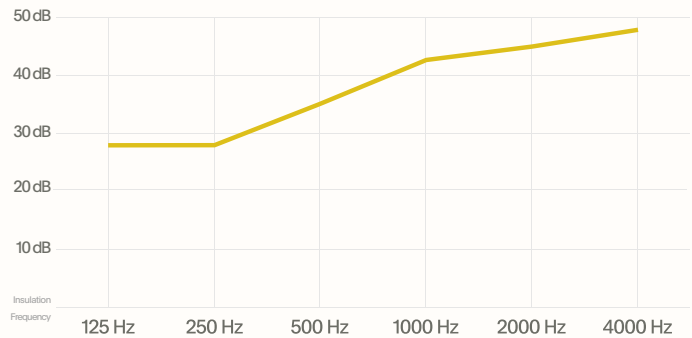


RT20 PERFORMANCE INSIDE PER PN-EN ISO 354:2005

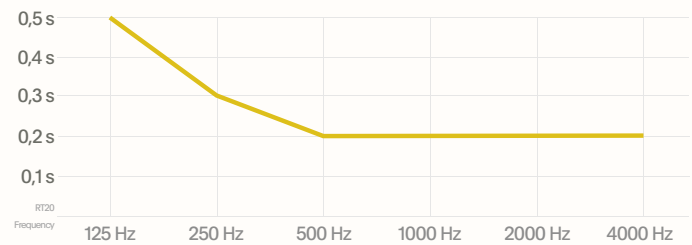


PACKING

- Space XL is delivered in 3 wooden cases, each of following dimensions:
  - W 2300 x D 850 x H 1300 mm
  - W 2300 x D 1084 x H 1500 mm
  - W 2500 x D 915 x H 390 mm




TECHNICAL SPECIFICATIONS

POWER CONSUMPTION




Standby: 10 W  
Working: 47 W (fans, LEDs)  
CE ✓RoHS 3 m cable




Max. power supply (exc. plugged receivers): 75 W  
Power supply voltage: 220-240 / 100-120 VAC, 50-60 Hz  
Supply voltage for ventilation, lighting and addons: 12 - 24 V DC


FANS PERFORMANCE



Airflow: 311 m³/ hour




Fan emitted noise level in LAeq  
Inside 33-40 dB  
Outside ≤ 39 dB




The level of outside noise measured at a distance of 1.5 meters.  
The Space series achieves one of the best results on the market.

External fan noise is comparable to one in typical open offices (<45 dB) and will create an acoustic background for employees nearby.

LIGHTING




Power: 24W  
Brightness: 530 lx (2120 lm at source)  
Light color temp.: 4000K




Fans and light activated  
by occupancy sensor

GLASS PROPERTIES PER EN 410




Light transmission: 87  
Light reflection: 8  
Solar energy transmittance: 70  
Reflection of solar radiation: 7  
Total solar energy transmittance: 76

HEALTH AND SUSTAINABILITY COMPLIANCES




Formaldehyde and VOC safe: EU E1 Standard  
Quality management system of ISO 9001  
Environmental management system of ISO 14001  
FSC Certificate No. C161812


STANDARD EQUIPMENT




Ventilation system




LED Light




Occupancy sensor




4 electric sockets in the table¹




Graphite carpet




3 wall hooks max load 5 kg




Light & ventilation control panel




HDMI port for a display²




USB-A port for a webcam²



LAN port in the table³



USB A+C port in the table²



Trapezoidal table

OPTIONAL ADD-ONS



TV bracket on the back frame



Right-handed door opening

OPTIONAL EQUIPMENT PROPERTIES mm



Frame-integrated bracket with VESA 400 plate (10 kg)

43" Recommended screen size

50" Maximum screen size

15 kg Maximum monitor weight


<sup>1</sup> Socket type E is installed as standard. Other electrical type should be requested.

<sup>2</sup> Electric socket and additional ports are available only in black.

<sup>3</sup> An optional 10 m LAN cable is set with the power cord and can be led out of the pod's floor (standard) or ceiling (option). Please make a selection while ordering.

SHAPE AND DIMENSIONS mm

+/- 3 mm

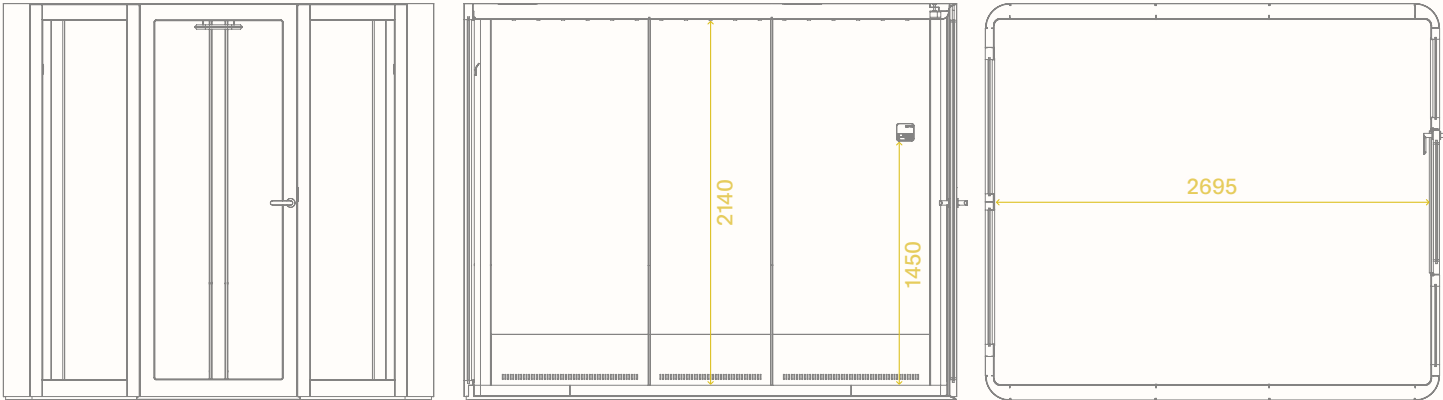

DIMENSIONS mm

	WIDTH	DEPTH	HEIGHT
External	2450	2800 +900 mm with open door	2247 +200 mm for ventilation +20 mm for leveling
Internal	2255	2695	2140

WEIGHTS kg

NET	GROSS
1050	1356 including wooden case and packaging parts

COMPOSITION

The construction of Space XL is the effect of work of our acoustics, technology and design departments. Walls of Space XL are built from several layers of meticulously chosen materials responsible for one of the highest results of sound isolation and sound absorption inside the pod.

- Absorbing materials

Metal covers
- Felt

Plywood
- Isolating materials

Soundproof glass


USAGE

- Open space
- Breakout area
- Other public spaces (including railway stations and airports)


CARE

- Keep the product dry
- Vacuum and clean regularly
- Follow the assembly instructions and terms of use

AVERAGE SOUND INSULATION

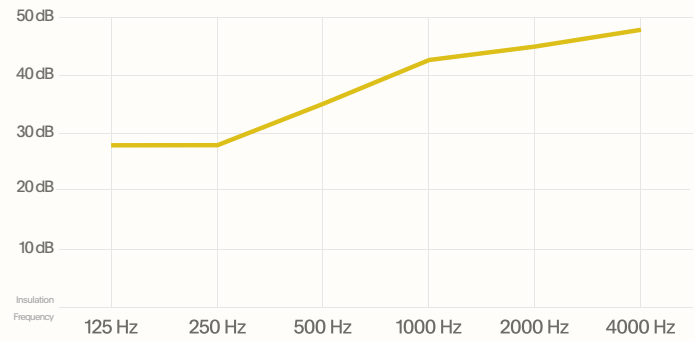

RT20 PERFORMANCE INSIDE PER PN-EN ISO 354:2005

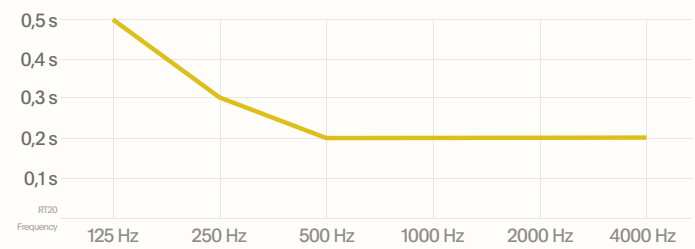


PACKING

- Space XL is delivered in 3 wooden cases, each of following dimensions:

W 2300 x D 850 x H 1300 mm

W 2300 x D 1084 x H 1500 mm

W 2500 x D 915 x H 390 mm



## TECHNICAL SPECIFICATIONS

## POWER CONSUMPTION



Standby: 10 W

Working: 47 W (fans, LEDs)

CE ✓RoHS 3 m cable



Max. power supply (exc. plugged receivers): 75 W

Power supply voltage: 220-240 / 100-120 VAC, 50-60 Hz

Supply voltage for ventilation, lighting  
and addons: 12 - 24 V DC

## LIGHTING



Power: 24 W

Brightness: 530 lx (2120 lm at source)

Light color temp.: 4000K

Fans and light activated  
by occupancy sensor

## FANS PERFORMANCE

Airflow: 311 m<sup>3</sup>/ hourFan emitted noise level in L<sub>Aeq</sub>

Inside 33-40 dB

Outside ≤ 39 dB

The level of outside noise measured at a distance of 1.5 meters.  
The Space series achieves one of the best results on the market.External fan noise is comparable to one in typical open offices  
(<45 dB) and will create an acoustic background for employees nearby.

## GLASS PROPERTIES PER EN 410



Light transmission: 87

Light reflection: 8

Solar energy transmittance: 70

Reflection of solar radiation: 7

Total solar energy transmittance: 76

## HEALTH AND SUSTAINABILITY COMPLIANCES



Formaldehyde and VOC safe: EU E1 Standard

Quality management system of ISO 9001

Environmental management system of ISO 14001

FSC Certificate No. C161812

## STANDARD EQUIPMENT

Ventilation  
systemLED  
LightOccupancy  
sensor3 electric sockets  
in the wall<sup>1</sup>Graphite  
carpet3 wall hooks  
max load 5 kgLight & ventilation  
control panelLAN port  
in the wall<sup>3</sup>USB A+C port  
in the wall<sup>2</sup>

## OPTIONAL ADD-ONS













Right-handed door opening

<sup>1</sup> Socket type E is installed as standard. Other electrical type should be requested.<sup>2</sup> Electric socket and additional ports are available only in black.<sup>3</sup> An optional 10 m LAN cable is set with the power cord and can be led out of the pod's floor (standard) or ceiling (option). Please make a selection while ordering.










FINISHES



1 EXTERNAL WALLS AND ROOF PAINT COLOURS

STANDARD	 Snow White Ultra Matt RAL 9003	
	 Powder Grey Ultra Matt RAL 7035	 New York Grey Ultra Matt NCS S 3000-N
EXTRA	 Pepper Grey Ultra Matt RAL 7012	 Panther Black Ultra Matt RAL 9005
	 Ceramic Red Ultra Matt NCS S 4050-Y70R	 Dusk Blue Ultra Matt NCS S 4010-B50G
	 St. Tropez Yellow Ultra Matt RAL 1018	 Whiteboard White Glossy Anti-graffiti coating
	 Custom colour From RAL palette	




2 EXTERNAL FRAME LAMINATES & VENEERS

STANDARD	 Snow White NCS S 0500-N	
	 Powder Grey NCS S 1502-G	 New York Grey NCS S 3000-N
EXTRA	 Dusk Blue NCS S 4010-B50G	 Ceramic Red NCS S 4050-Y70R
	 Whitebard White Glossy 9417-HW	 Black Premium Anti-fingerprint 0720
	 Maple Wood	 Oak Wood

3 INTERNAL TABLETOP LAMINATES & VENEERS

STANDARD	 Snow White NCS S 0500-N	
	 Powder Grey NCS 1502-G	 New York Grey NCS S 3000-N
EXTRA	 Dusk Blue NCS S 4010-B50G	 Ceramic Red NCS S 4050-Y70R
	 Grey Premium Anti-fingerprint 0725	 Black Premium Anti-fingerprint 0720
	 Maple Wood	 Oak Wood

4 INTERNAL FELT LININGS

 Beige	 Grey
 Dark Grey	